


PRELIMINARY

SB 10i ULTRA-COMPACT SUBWOOFER

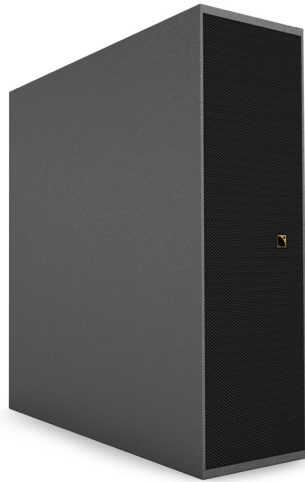

L-VENTS


Description	Ultra compact subwoofer: 1 x 10'' amplified by LA2Xi / LA4X / LA8 / LA12X
Low frequency limit (-10 dB)	27 Hz ([SB10_100])
Maximum SPL¹	124 dB ([SB10_200])
Nominal directivity	Standard
Transducers	1 x 10'' cone driver
Acoustical load	Bass-reflex, L-Vents
Nominal impedance	8 Ω
Connectors	4-point terminal block with push-in connection and connector sealing plate
Rigging and handling	8 x M6 inserts for external rigging kits in on-wall integration
Weight (net)	15 kg / 33 lb
Cabinet	Premium grade Baltic birch plywood
Front	Coated steel grill Acoustically neutral 3D fabric
Finish	Dark grey brown Pantone 426 C Pure white RAL 9010 Custom RAL code on special order
IP	IP55

¹ Peak level at 1 m under half space conditions using pink noise with crest factor 4 (preset specified in brackets).

INTEGRATION




► SB10i on the ground

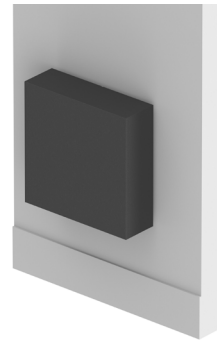

► SB10i on-wall integration


DIMENSIONS




Front



Side



Top



Bottom